



# HEIDENHAIN



## Digital Readouts for Metrology Applications

May 2010

For many metrology applications, ranging from simple measuring stations to complex inspection systems with multiple measuring points, HEIDENHAIN supports you with the appropriate digital readouts or PC solutions.

The functionality always orients itself to the specific application. Whether it is an SPC inspection station, a tool presetter, a profile projector, a measuring microscope, or a manual coordinate measuring machine, the **digital readouts and PC solutions for metrology applications** from HEIDENHAIN are the right choice for measurement tasks. There is even a CNC option for the automation of measurement tasks.

**Digital readouts from HEIDENHAIN** for manual machine tools optimally support the operator with cycles for milling, drilling and turning. You can find these digital readouts on the Internet under [www.heidenhain.de](http://www.heidenhain.de) or in the *Position Display Units and Linear Encoders for Manually Operated Machine Tools* product brochure.



Digital readouts and PC solutions for metrology applications

# Table of Contents

<b>Overview</b>			
	Selection Guide		4
<b>Specifications</b>			
	<b>ND 1100 QUADRA-CHEK</b> – for simple positioning tasks		6
	<b>ND 1200 QUADRA-CHEK</b> – for 2-D geometries		8
	<b>ND 1300 QUADRA-CHEK</b> – for convenient 2-D measurement		10
	<b>ND 1400 QUADRA-CHEK</b> – for manual 3-D measuring machines		12
	<b>IK 5000 QUADRA-CHEK</b> – universal PC package solution		14
	<b>ND 1200T TOOL-CHEK</b> – for tool presetters		18
	<b>ND 2100G GAGE-CHEK</b> – for multipoint inspection apparatuses		20
<b>Mounting</b>			
	Dimensions		22
	Installation, Protective Cover		23
<b>Accessories</b>			
	Calibration and Demonstration Parts		24
	External Control Elements		25
	Optical Edge Detector		26
	Servo Amplifiers		27
<b>Electrical Connection</b>			
	Interfaces	Overview	28
		Encoder connections	30
	Software	QUADRA-CHEK Wedge	31

# Selection Guide

	Monitor	Axes		Functions
		Length	Angle	
<b>ND 1100 QUADRA-CHEK</b> <ul style="list-style-type: none"> <li>Positioning equipment</li> <li>Measuring fixtures</li> <li>Manual coordinate measuring machines</li> </ul>	Monochrome	2 (adjustable)		Measurement series with MIN/MAX display
3 (adjustable)				
4 (adjustable)				
<b>ND 1200 QUADRA-CHEK</b> <ul style="list-style-type: none"> <li>Profile projectors</li> <li>Measuring microscopes</li> <li>2-D measuring machines</li> </ul>	Monochrome	2 (XY)	–	<ul style="list-style-type: none"> <li>Measurement of 2-D features</li> <li>Measure Magic function</li> <li>Point measurement with crosshairs</li> <li>Programming of features and parts</li> <li>Graphic display of measurement results</li> </ul>
2 (XY)		1 (Q)		
3 (XYZ)		–		
3 (XYZ)		1 (Q)		
<b>ND 1300 QUADRA-CHEK</b> <ul style="list-style-type: none"> <li>Profile projectors</li> <li>Measuring microscopes</li> <li>Video measuring machines</li> </ul>	Color touchscreen	2 (XY)	–	<ul style="list-style-type: none"> <li>Measurement of 2-D features</li> <li>Measure Magic function</li> <li>Point measurement with crosshairs</li> <li>Programming of features and parts</li> <li>Graphic display of measurement results</li> </ul>
2 (XY)		1 (Q)		
3 (XYZ)		–		
3 (XYZ)		1 (Q)		
<b>ND 1400 QUADRA-CHEK</b> <ul style="list-style-type: none"> <li>Manual coordinate measuring machines</li> </ul>	Color touchscreen	3 (XYZ)	1 (Q)	<ul style="list-style-type: none"> <li>Measurement of 2-D and 3-D features</li> <li>Points measured via touch probe, crosshairs or rigid probing element</li> <li>Measure Magic function</li> <li>Programming of features and parts</li> <li>Graphic display of measurement results</li> <li>Five coordinate systems can be stored</li> <li>Touch-probe management</li> </ul>
<b>ND 1200T TOOL-CHEK</b> <ul style="list-style-type: none"> <li>Tool presetters</li> </ul>	Monochrome	2 (XY)	–	<ul style="list-style-type: none"> <li>Point measurement with crosshairs</li> <li>99 tool adapters and 300 tools</li> </ul>
<b>ND 2100G GAGE-CHEK</b> <ul style="list-style-type: none"> <li>Multipoint inspection apparatuses</li> <li>SPC inspection stations</li> </ul>	Color	4 (adjustable)		<ul style="list-style-type: none"> <li>Programming of up to 100 parts</li> <li>Graphic display of measurement results</li> <li>Classification using tolerance and warning limits</li> <li>Measurement series with MIN/MAX display</li> <li>Entry of formulas and combinations</li> <li>Functions for statistical process control (SPC)</li> </ul>
8 (adjustable)				
<b>ND 200</b> <ul style="list-style-type: none"> <li>Measuring fixtures</li> <li>Adjustment and inspection equipment</li> <li>SPC inspection stations</li> </ul>	Color	1 (adjustable)		<ul style="list-style-type: none"> <li>Metrology and statistical functions (classification, measurement series, SPC)</li> </ul>
<b>IK 5000 QUADRA-CHEK</b> Universal PC package solution for <ul style="list-style-type: none"> <li>Profile projectors</li> <li>Measuring microscopes</li> <li>Video measuring machines</li> <li>Coordinate measuring machines</li> </ul>	PC screen	3 (XYZ)	1 (Q)	<ul style="list-style-type: none"> <li>Measurement of 2-D and 3-D features (depending on the version)</li> <li>Point measurement with crosshairs</li> <li>Programming of features and parts</li> <li>Graphic display of measurement results</li> <li>Entry of tolerances</li> <li>Import of CAD drawings for direct comparison</li> </ul>
3 (XYZ)		–		
3 (XYZ)		1 (Q)		
3 (XYZ)		1 (Q)		
3 (XYZ)		–		
3 (XYZ)		1 (Q)		
3 (XYZ)		1 (Q)		
3 (XYZ)		1 (Q)		

Options/Additional functions	Model	Page
Touch probe	ND 1102	6
	ND 1103	
	ND 1104	
Optical edge detector	ND 1202	8
	ND 1203	
	ND 1204	
<ul style="list-style-type: none"> <li>• Optical edge detector</li> <li>• Video edge detection and live image display</li> <li>• Archiving and output of live images</li> <li>• Zoom and light control, programmable</li> <li>• CNC axis control and autofocus</li> </ul>	ND 1302	10
	ND 1303	
	ND 1304	
–	ND 1404	12
–	ND 1202T	18
–	ND 2104 G	20
	ND 2108 G	
Second encoder for sum/difference display, temperature compensation	ND 287	Catalog: <i>Position Display Units</i>
–	IK 5294	14
3-D; touch probe	IK 5293	
Optical edge detector	IK 5394-EG	
3-D; zoom and light control; video evaluation; touch probe	IK 5394-3D	
CNC; optical edge detector	IK 5493	
CNC; video evaluation; zoom and light control; autofocus	IK 5494-2D	
CNC; 3-D; video evaluation; touch probe; zoom and light control; autofocus	IK 5494-3D	
CNC; 3-D; video evaluation; touch probe TP 200; zoom and light control; autofocus	IK 5594	



ND 1100 QUADRA-CHEK



ND 1200 QUADRA-CHEK



ND 1300 QUADRA-CHEK



ND 2100 G GAGE-CHEK



ND 200



IK 5000 QUADRA-CHEK

# ND 1100 QUADRA-CHEK

## – the Digital Readouts for Simple Positioning Tasks

The ND 1100 QUADRA-CHEK digital readouts can support up to four axes. They are mainly suited to positioning tasks on positioning equipment and measuring fixtures, as well as for retrofitting on measuring machines for data acquisition and relaying to a PC.

### Description

The ND 1100 QUADRA-CHEK digital readouts have a monochrome flat-panel screen for displayed values, dialogs, inputs and soft keys. The robust, diecast aluminum enclosure meets the demands of metrology and production control.

### Functions

The logical placement of the function keys and soft keys permits innovative operator guidance, which supports you when using the diverse functions.

Along with the usual functions of a digital readout, such as zeroing and setting of reference values, the ND 1100 QUADRA-CHEK units have numerous more useful functions:

- Each axis can be configured for linear or angular display
- Minimum/maximum value storage
- Simple switching between counting directions
- Continuous data output via internal clock, or upon probing

### Data interfaces

You use the data interfaces to output measurement points as well as to save settings and compensation values. The ND 1100 has an RS-232-C/V.24 serial interface for communication with a PC. You can connect printers or memory media directly to the USB port.

### Display format

Depending on the type of encoder connected, you can define linear or angular display individually for each axis.

X	14.5653		
Y	-8.2776		
Z	20°30'50"		
Q	324°55'30"		
Abs	MM	Menu	Preset


### Minimum/maximum value storage

The ND 1100 is capable of minimum/maximum value storage in any freely selectable axis. The largest and smallest measured values of a measurement series, as well as the difference, are stored, and can be output via the data interface. This function is especially advantageous during concentricity testing.

MinMax	MAX	14.7653		
X	MIN	14.5653		
X	RANGE	0.2000		
Both	MAX	MIN	New	Preset

### Touch-probe connection

Touch probes (e.g. from HEIDENHAIN or Renishaw) can be connected to the ND 1100. The digital readout automatically reads the current position value during probing, and also takes the radius of the stylus into account.

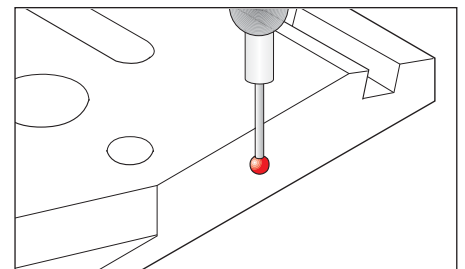

### Display format of measured values

Since the universal output formats are used by various manufacturers of measuring machines, the ND 1100 can easily be retrofitted as a data logger to manually operated measuring machines. The measured values are captured by the ND, and then relayed to a connected PC for further processing.

X	12.3553 mm
Y	-8.2006 mm
Z	20.30.50 dms
Q	326.37.30 dms



	ND 1102	ND 1103	ND 1104
<b>Axes</b>	2	3	4
<b>Encoder inputs*</b>	~ 1 V <sub>pp</sub> or □□TTL (other interfaces upon request)		
<b>Subdivision factor</b>	10-fold (only for 1 V <sub>pp</sub> )		
<b>Display step<sup>1)</sup></b>	Adjustable, max. 7 digits Linear axis: 1 mm to 0.0001 mm Angular axis: 1° to 0.0001° (00° 00' 01")		
<b>Display</b>	5.7" monochrome flat-panel display for position values, dialogs and inputs, and soft keys		
<b>Functions</b>	<ul style="list-style-type: none"> <li>• Measurement series with MIN/MAX display</li> <li>• Difference between minimum and maximum (range)</li> <li>• Scaling factor</li> </ul>		
<b>Error compensation</b>	<ul style="list-style-type: none"> <li>• Linear, and segmented over up to 60 points</li> <li>• Squareness calibration</li> </ul>		
<b>Data interface</b>	<ul style="list-style-type: none"> <li>• RS-232-C/V.24</li> <li>• USB (type A)</li> </ul>		
<b>Touch-probe connection*</b>	HEIDENHAIN touch probe or Renishaw touch probe		
<b>Other connections</b>	Foot switch for two functions, or remote keypad		
<b>Accessories</b>	Foot switch, remote keypad, protective cover		
<b>Main power input</b>	100 V~ to 240 V~ (-15 % to +10 %), 43 Hz to 63 Hz		
<b>Operating temperature</b>	0 °C to +45 °C		
<b>Protection EN 60529</b>	IP 00, front panel IP 40		
<b>Mounting*</b>	Tilting base or mounting base		
<b>Weight</b>	ND with tilting base: approx. 4.8 kg; ND with mounting base: approx. 2 kg		

\* Please select when ordering

<sup>1)</sup> Depends on the signal period of the connected encoder as well as the subdivision factor

# ND 1200 QUADRA-CHEK

## – the Digital Readouts for 2-D Geometries

The ND 1200 digital readouts can support up to four axes, and function as measuring computers for 2-D geometries. They are mainly suited to optical comparators, measuring microscopes and 2-D measuring machines.

### Description

The ND 1200 QUADRA-CHEK digital readouts have a monochrome flat-panel screen for displayed values, dialogs and inputs, graphics functions and soft keys. The robust, diecast aluminum enclosure meets the demands of metrology and production control.

### Functions

The appropriate combination of defined function keys and context-dependent soft keys always provides you with a clear overview. The innovative operator guidance provides self-explanatory information about the various functions. It already supports you while setting up the coordinate system (aligning the part and specifying the datum).

Predefined features (point, line, circle) are available for measurement. The "Measure Magic" function makes measurement especially easy: it selects that feature which best matches the shape implied by the points probed. In addition, you can establish relationships (distances, angles) between features.

You can apply tolerance values to features and relationships. Only those tolerances actually possible are offered for the selected feature. You can create or automatically record measuring programs for repeated parts. The digital readout graphically takes you to the next measurement position during program run.

The ND 1200 captures measurement points of plane contours (2-D) either manually via crosshairs or, as an option, automatically via the optical edge detector.

### Data interfaces

You use the data interfaces to output measurement points as well as to load and save settings, compensation values and programs. The RS-232-C/V.24 serial interface enables communication with a PC. You can connect printers or memory media to the USB port.

### Graphic display

In addition to the position values, the ND 1200 also displays the features graphically. Along with the individual measurement points, the geometrical and arithmetical deviations are also shown. Furthermore, for circles the maximum inscribed circles and minimum circumscribed circles are shown.

### Tolerances





You can apply tolerance values to any feature. Only those tolerances actually possible are offered for the selected feature. This means that a point can only be assigned a tolerance check for its position, whereas a circle can be assigned position, shape and size tolerances.

### Defining features

You can use the QUADRA-CHEK digital readouts to define features yourself. For example, this could be a circle whose position and dimensions are exactly defined, or an alignment line that is at a specified angle to a measurable line.

### Measure Magic

The Measure Magic function recognizes the geometric pattern based on the distribution of the measurement points, and automatically calculates which feature it is, such as a point, line or circle. If the measurement points are poorly chosen, then it may not be possible to determine the feature unambiguously. Measure Magic then chooses the more common version. You can have the feature be displayed graphically, and then select from the possibilities.

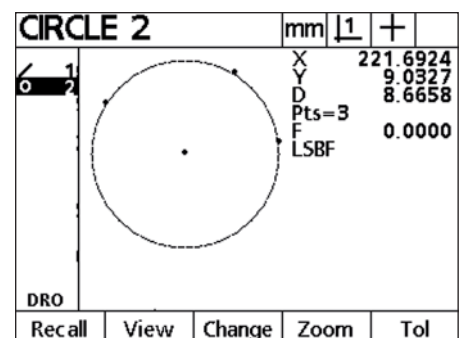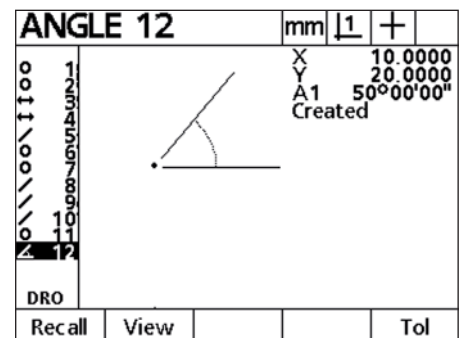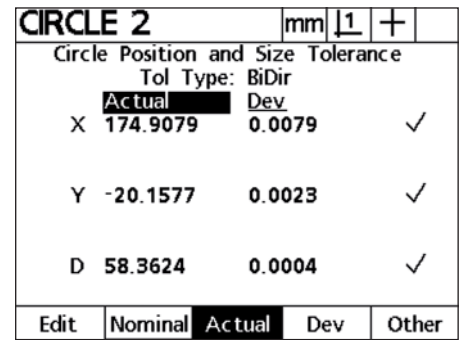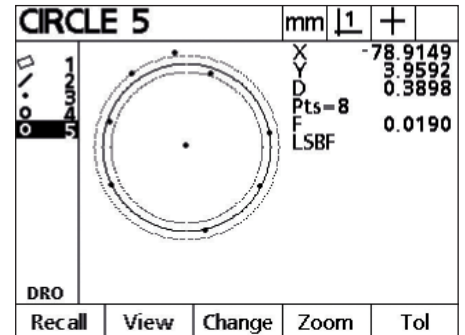



	ND 1202	ND 1203	ND 1204
<b>Axes*</b>	2 (XY)	3 (XYQ) or 3 (XYZ)	4 (XYZQ)
<b>Encoder inputs*</b>	~ 1 V <sub>pp</sub> or □□TTL (other interfaces upon request)		
<b>Subdivision factor</b>	10-fold (only for 1 V <sub>pp</sub> )		
<b>Display step<sup>1)</sup></b>	Adjustable, max. 7 digits Linear axes XYZ: 1 mm to 0.0001 mm Angular axis Q: 1° to 0.0001° (00° 00' 01")		
<b>Display</b>	5.7" monochrome flat-panel display for position values, dialogs and inputs, graphics functions and soft keys		
<b>Functions</b>	<ul style="list-style-type: none"> <li>• Measurement of two-dimensional features (2-D)</li> <li>• Point measurement with crosshairs</li> <li>• Programming of features and parts</li> <li>• Measure Magic: automatic recognition of geometries</li> <li>• Graphic display of measurement results</li> <li>• Entry of tolerances</li> <li>• Measurement series with MIN/MAX display</li> </ul>		
<b>Edge detector*</b>	Automatic saving of measurement points via optical edge detector (option)	Upon request	
<b>Error compensation</b>	<ul style="list-style-type: none"> <li>• Linear, and segmented over up to 150 points</li> <li>• Squareness calibration</li> <li>• Matrix compensation over up to 30 x 30 points</li> </ul>		
<b>Data interface</b>	<ul style="list-style-type: none"> <li>• RS-232-C/V.24</li> <li>• USB (type A)</li> </ul>		
<b>Other connections</b>	<ul style="list-style-type: none"> <li>• Foot switch for two functions, or remote keypad</li> <li>• Optical edge detector (only if the option has been chosen)</li> </ul>		
<b>Accessories</b>	Foot switch, remote keypad, fiber-optic cables, holder, demo part, protective cover		
<b>Main power input</b>	100 V~ to 240 V~ (-15 % to +10 %), 43 Hz to 63 Hz		
<b>Operating temperature</b>	0 °C to +45 °C		
<b>Protection EN 60529</b>	IP 00, front panel IP 40		
<b>Mounting*</b>	Tilting base or mounting base		
<b>Weight</b>	ND with tilting base: approx. 4.8 kg; ND with mounting base: approx. 2 kg		

\* Please select when ordering

<sup>1)</sup> Depends on the signal period of the connected encoder as well as the subdivision factor

# ND 1300 QUADRA-CHEK

## – the Digital Readouts for Convenient 2-D Measurement

The ND 1300 QUADRA-CHEK digital readouts can support up to four axes. They function as measuring computers with 2-D acquisition of measurement points, suiting them for measuring microscopes, measuring projectors and profile projectors, as well as for video measuring machines if the video edge detection option is chosen.

### Description

The digital readouts of the ND 1300 series are characterized by the large, color touchscreen. Their enclosures consist of robust, diecast aluminum.

### Functions

The innovative operator guidance provides self-explanatory information about the various functions. It already supports you while setting up the coordinate system (aligning the part and specifying the datum).

Predefined features (point, line, circle, slot and rectangle) are available for measurement. The "Measure Magic" function makes measurement especially easy. In addition, you can establish relationships (distances, angles) between features.

You can create or automatically record measuring programs for repeated parts. The digital readout graphically takes you to the next measurement position during program run.


Depending on the option installed, the ND 1300 saves measurement points of plane (2-D) contours either automatically or manually via crosshairs, optical edge detection, or a video camera. The integrated image processing function of the video option provides a special benefit: the video image is shown on the screen in real time, and can be saved and output via the data interface. The digital readout even assumes complete control of the illumination and the motor zoom.

### Data interfaces

You use the data interfaces to output measurement points as well as to read and transmit settings, compensation values and programs. The RS-232-C/V.24 serial interface enables communication with a PC. You can connect printers or memory media to the USB port.


### Clearly structured display

The large, color, flat-panel touchscreen enables simple operation with intuitive operator guidance, since in each mode only those functions actually available are offered for selection. The numeric keypad and the few basic function keys are located in ergonomically favorable positions.

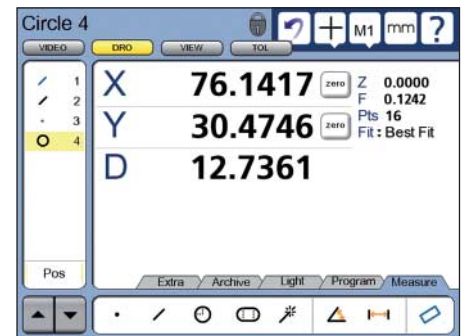


### Saving of measurement points

The ND 1300 readouts are designed for 2-D measurements. You are provided with various tools with which you can manually or automatically save measurement points. For automatic saving of measurement points you simply roughly approach the position. The actual edge is automatically detected by the active tool (option). This objective saving of the measurement point permits a high degree of repeatability. This makes it possible for you to work quickly and reliably, without tiring, while at the same time maintaining a low degree of measurement uncertainty.

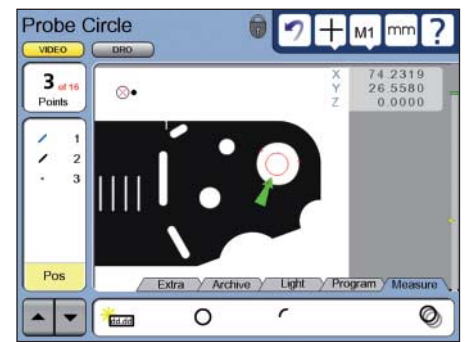


### Integrated image processing

The ND 1300 with video option optimally combines in one unit the functions of a position display unit with the capability of displaying the image of the measured object directly on the screen. The separate PC with a frame grabber or monitor with crosshair generator that you would normally need is not necessary. Video cameras with S-Video or composite interfaces can be connected.

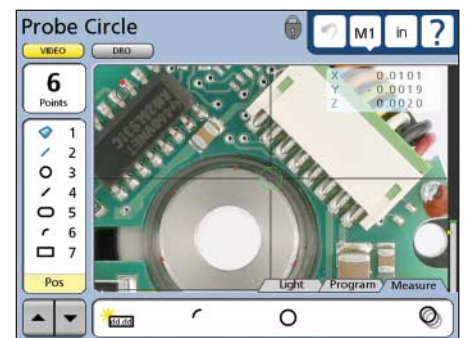

### Axis positioning

The CNC option lets the ND 1300 work as a full-fledged control, directly controlling the positioning of the X, Y, Z and Q axes. Servo and stepper motors can be connected. The necessary servo amplifiers for two or three axes are available as accessories.

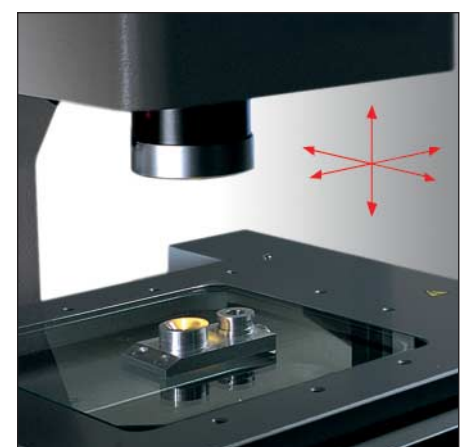



	ND 1302	ND 1303	ND 1304
<b>Axes*</b>	2 (XY)	3 (XYQ) or 3 (XYZ)	4 (XYZQ)
<b>Encoder inputs*</b>	~ 1 V <sub>pp</sub> or □□TTL (other interfaces upon request)		
<b>Subdivision factor</b>	10-fold (only for 1 V <sub>pp</sub> )		
<b>Display step<sup>1)</sup></b>	Adjustable, max. 7 digits <i>Linear axes XYZ: 1 mm to 0.0001 mm; Angular axis Q: 1° to 0.0001° (00° 00' 01")</i>		
<b>Display</b>	8.4" color flat-panel display (touchscreen); resolution: SVGA 800 x 600 pixels, for position values, dialogs and inputs, graphics functions, soft keys, and display of video images with the <i>Video</i> option		
<b>Functions</b>	<ul style="list-style-type: none"> <li>• Measurement of two-dimensional features (2-D)</li> <li>• Point measurement with crosshairs</li> <li>• Programming of features and parts</li> <li>• Measure Magic: automatic recognition of geometries</li> <li>• Graphic display of measurement results</li> <li>• Entry of tolerances</li> </ul>		
<b>Edge detector* (option)</b>	<ul style="list-style-type: none"> <li>• Automatic saving of measurement points via optical edge detector</li> </ul>		
<b>Video* (option)</b>	<ul style="list-style-type: none"> <li>• Automatic saving of measurement points via video edge detection</li> <li>• Manual autofocus (only for Z axis)</li> <li>• Show live images</li> <li>• Archive and output live images (<i>Archive</i> option, only with the <i>Video</i> and <i>Zoom</i> options)</li> <li>• Zoom and light control, programmable (<i>Zoom</i> option, only with the <i>Video</i> and <i>CNC</i> options)</li> </ul>		
<b>CNC* (option)</b>	<ul style="list-style-type: none"> <li>• Automation of measurement tasks</li> <li>• Axis control (for XYZQ) for servo and stepper motors</li> <li>• Autofocus via step-motor control</li> </ul>		
<b>Error compensation</b>	<ul style="list-style-type: none"> <li>• Linear, and segmented over up to 1000 points</li> <li>• Squareness calibration; matrix compensation over up to 30 x 30 points</li> </ul>		
<b>Data interface</b>	RS-232-C/V.24; USB (type A)		
<b>Other connections</b>	<ul style="list-style-type: none"> <li>• Foot switch for two functions, or remote keypad</li> <li>• Video connection for S-Video and composite (<i>Video</i> option)</li> <li>• Light control over six light sources and zoom control (for <i>Video</i> and <i>Zoom</i> options)</li> <li>• CNC outputs and inputs for joystick (for <i>CNC</i> option)</li> </ul>		
<b>Accessories</b>	Foot switch, remote keypad, fiber-optic cables, holder, servo amplifier, calibration standard, demo parts, protective cover		
<b>Main power input</b>	100 V~ to 240 V~ (-15 % to +10 %), 43 Hz to 63 Hz		
<b>Operating temperature</b>	0 °C to +45 °C		
<b>Protection EN 60529</b>	IP 00, front panel IP 40		
<b>Mounting*</b>	Tilting base or mounting base		
<b>Weight</b>	<i>ND with tilting base: approx. 4.8 kg; ND with mounting base: approx. 2 kg</i>		

\* Please select when ordering; the *Edge detector* and *Video* options cannot be combined

<sup>1)</sup> Depends on the signal period of the connected encoder as well as the subdivision factor

# ND 1400 QUADRA-CHEK

## – the Digital Readout for Manual 3-D Measuring Machines

The ND 1400 QUADRA-CHEK digital readout supports four axes: in addition to the linear axes XYZ it features an auxiliary axis Q solely for angular display. The readout is designed specifically for manual coordinate measuring machines, and can capture two- and three-dimensional features with its measuring computer functionality.

### Description

The ND 1400 digital readout is characterized by the large, color touchscreen. Its enclosure consists of robust, diecast aluminum.

### Functions

The innovative operator guidance provides self-explanatory information about the various functions. It already supports you while setting up the coordinate system (ascertaining the reference plane, aligning the part and specifying the datum).

Predefined features (point, line, circle, slot, rectangle, plane, cylinder, cone, sphere) are available for measurement. The "Measure Magic" function makes measurement especially easy: it selects that feature which best matches the shape implied by the points probed. In addition, you can establish relationships (distances, angles) between all features.

You can create or automatically record measuring programs for repeated parts. The digital readout graphically takes you to the next measurement position during program run.


You can also use the ND 1400 to measure 3-D features, such as surfaces, cylinders, cones, etc. The measurement points are probed with a touch probe. If a triggering touch probe is used the values are saved automatically. With rigid probing elements a key must be pressed. The measured features can be clearly displayed either in three dimensions or in one of the three projection planes.

### Data interfaces

You use the data interfaces to output measurement points as well as to read and transmit settings, compensation values and programs. The RS-232-C/V.24 serial interface enables communication with a PC. You can connect printers or memory media to the USB port.


### Clearly structured display

The large, color, flat-panel touchscreen enables simple operation with intuitive operator guidance, since in each mode only those functions actually available are offered for selection. The numeric keypad and the few basic function keys are located in ergonomically favorable positions.

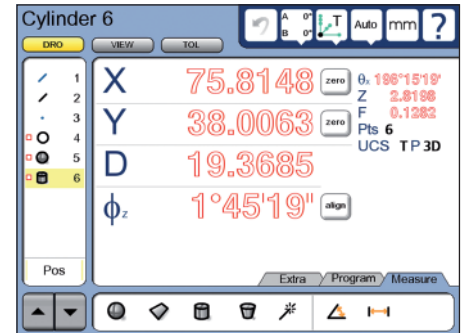


### Measuring 3-D contours

In addition to the flat geometric features, such as points, lines, circles, etc., you can also use the ND 1400 to measure 3-D shapes, e.g. cylinders or cones. The screen displays the feature in three dimensions. Colored highlighting of each measurement point lets you identify form errors and any filtered measured values at a glance. The ND 1400 also permits 3-D position and form tolerances, such as flatness and parallelism.

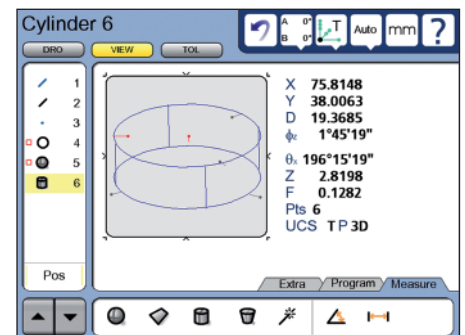


### Working with the touch probe

The ND 1400 also supports you optimally while working with touch probes. You can instantaneously call commercial probing elements (normal stylus, star stylus), as well as rigid and tiltable probing heads, all of which are managed in a library, via the touchscreen. During probing the ND automatically takes the direction of probing into account, as well as the length and diameter of the stylus. Even complex parts can be rapidly measured with the five available coordinate systems.

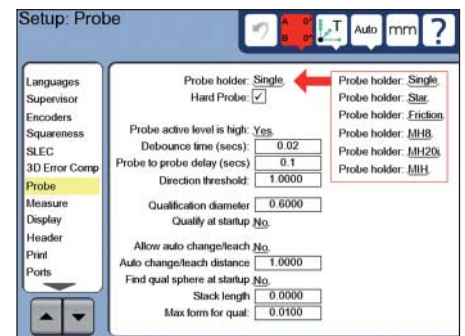

### Saving of measurement points

The ND 1400 saves the measurement points via the touch probe of the coordinate measuring machine. A triggering 3-D touch probe is connected directly to the digital readout, and the measured value is transferred automatically. With a rigid probing element the measured value must be saved by pressing a key. You can use the comprehensive input menu to define numerous parameters.

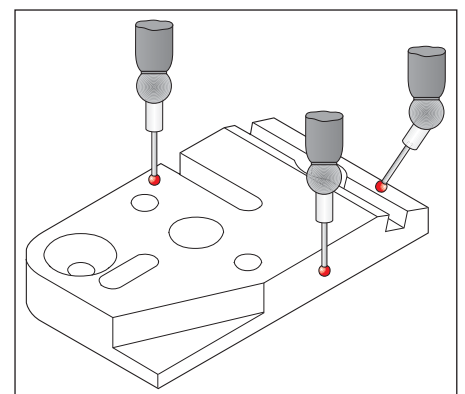



	<b>ND 1404</b>
<b>Axes</b>	4 (XYZQ)
<b>Encoder inputs*</b>	$\sim$ 1 V <sub>pp</sub> or $\square$ TTL (other interfaces upon request)
<b>Subdivision factor*</b>	10-fold (only for 1 V <sub>pp</sub> )
<b>Display step<sup>1)</sup></b>	Adjustable, max. 7 digits Linear axes XYZ: 1 mm to 0.0001 mm Angular axis Q: 1° to 0.0001° (00° 00' 01")
<b>Display</b>	8.4" color flat-panel display (touchscreen); resolution: SVGA 800 x 600 pixels, for position values, dialogs and inputs, graphics functions and soft keys
<b>Functions</b>	<ul style="list-style-type: none"> <li>• Measurement of two-dimensional and three-dimensional features (3-D)</li> <li>• Points measured via crosshairs or rigid probing element</li> <li>• Automatic acquisition of measurement points via touch probe</li> <li>• Programming of features and parts</li> <li>• Measure Magic: automatic recognition of geometries</li> <li>• Graphic display of measurement results, either three-dimensional or in the three projection planes</li> <li>• Entry of tolerances</li> <li>• Five coordinate systems can be stored</li> <li>• Touch-probe management for the various stylus shapes</li> </ul>
<b>Error compensation</b>	<ul style="list-style-type: none"> <li>• Linear, and segmented over up to 1000 points</li> <li>• Squareness calibration</li> <li>• Matrix compensation over up to 30 x 30 points</li> </ul>
<b>Data interface</b>	<ul style="list-style-type: none"> <li>• RS-232-C/V.24</li> <li>• USB (type A)</li> </ul>
<b>Touch-probe connection*</b>	HEIDENHAIN touch probe or Renishaw touch probe
<b>Other connections</b>	Foot switch for two functions
<b>Accessories</b>	Mounting base, foot switch, 3-D demo part, protective cover
<b>Main power input</b>	100 V~ to 240 V~ (-15 % to +10 %), 43 Hz to 63 Hz
<b>Operating temperature</b>	0 °C to +45 °C
<b>Protection EN 60529</b>	IP 00, front panel IP 40
<b>Mounting*</b>	Tilting base or mounting base
<b>Weight</b>	ND with tilting base: approx. 4.8 kg; ND with mounting base: approx. 2 kg

\* Please select when ordering

<sup>1)</sup> Depends on the signal period of the connected encoder as well as the subdivision factor

# IK 5000 QUADRA-CHEK

– the Universal PC Package Solution for Measuring Machines

IK 5000 QUADRA-CHEK, the universal PC package solution for 2-D and 3-D measuring tasks, is equally suitable for initial equipping on a machine as well as for retrofitting. It is available in versions for three or four axes, and the optional expansion stages make it ready for all coordinate measuring technology applications and for video measuring microscopes. You can use it to measure two- and three-dimensional geometries and their relationships.

## Description

IK 5000 QUADRA-CHEK consists of the IK 5000 slot card for the PC as well as the additional necessary slot covers, and the corresponding PC software. Once installed on your PC you will have a powerful measuring station.


## System requirements

The following is necessary to run QUADRA-CHEK:

- PC:  $\geq$  dual-core Pentium, 2.66 GHz
- Operating system: Windows XP or Vista
- RAM:  $\geq$  1GB
- Hard disk: At least 500 MB available
- One PCI slot and one, two or three additional empty slots (depending on the version)
- Screen:  
Resolution at least 1024 x 768 pixels;  
for the *video function*: 22" widescreen,  
resolution at least 1680 x 1050 pixels

## Configuration

Various versions of the IK 5000 are available. Please see the configuration table for the model designations and various functions supported.

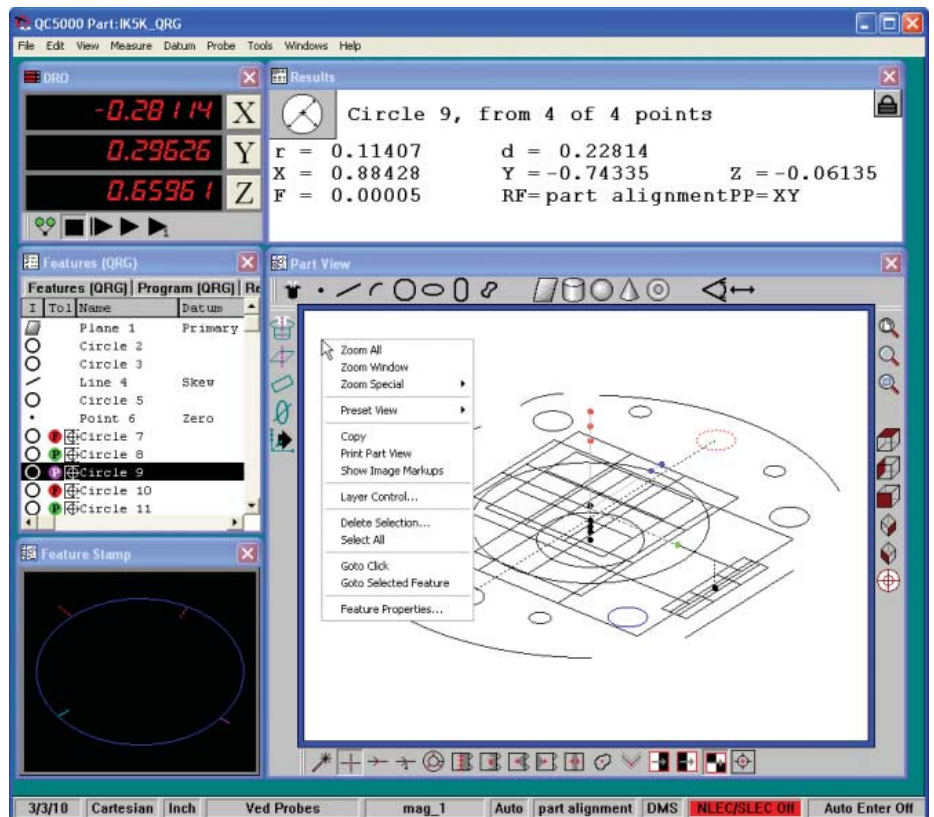

## User interface

The IK 5000 QUADRA-CHEK screen shows various configurable windows and tool fields for clear and simple operation.

The **Part View** window shows the measured features with the accepted measurement points. You can also define relationships here.

The **Video** window (only in the version with video evaluation) shows the video image in real time.

The **Template** windows list all measured features, relationships and constructed features together with their values and tolerances in tables.

The element currently being measured is shown in the **Feature Stamp** window. The **Results** window contains all corresponding information.

The current measurement position is shown in the **DRO** window.

	IK 5294	IK 5293	IK 5394-EG	IK 5394-3D	IK 5493	IK 5494-2D	IK 5494-3D	IK 5594
<b>Axes</b>	4 XYZQ	3 XYZ	4 XYZQ	4 XYZQ	3 XYQ	4 XYZQ	4 XYZQ	4 XYZQ
<b>2-D geometries</b>	●	●	●	●	●	●	●	●
<b>3-D geometries</b>	–	●	–	●	–	–	●	●
<b>Optical edge detector</b>	–	–	●	–	●	–	–	–
<b>Video evaluation</b>	–	–	–	●	–	●	●	●
<b>Zoom and light control</b>	–	–	–	●	–	●	●	●
<b>Autofocus</b>	–	–	–	–	–	●	●	●
<b>Touch probe</b>	–	●	–	●	–	–	●	TP200
<b>CNC function</b>	–	–	–	–	●	●	●	●



	<b>IK 5000</b>
<b>Axes<sup>1)</sup></b>	3 (XYQ), 3 (XYZ) or 4 (XYZQ)
<b>Encoder inputs*</b>	$\sim$ 1 V <sub>pp</sub> or $\square$ TTL (other interfaces upon request)
<b>Subdivision factor</b>	Up to 100-fold, selectable via dip switch; default setting: 50-fold (only for 1 V <sub>pp</sub> )
<b>Display step<sup>2)</sup></b>	Adjustable, max. 7 digits <i>Linear axes XYZ:</i> 1 mm to 0.0001 mm <i>Angular axis Q:</i> 1° to 0.0001° (00° 00' 01")
<b>Display</b>	Via PC screen
<b>Functions</b>	<ul style="list-style-type: none"> <li>• Measurement of two-dimensional features (2-D)</li> <li>• Measurement of three-dimensional features (3-D)<sup>1)</sup></li> <li>• Point measurement with crosshairs</li> <li>• Programming of features and parts</li> <li>• Measure Magic: automatic recognition of geometries</li> <li>• Graphic display of measurement results</li> <li>• Entry of tolerances</li> </ul>
<b>Edge detector<sup>1)</sup></b>	<ul style="list-style-type: none"> <li>• Automatic saving of measurement points via optical edge detector</li> </ul>
<b>Video<sup>1)</sup></b>	<ul style="list-style-type: none"> <li>• Automatic saving of measurement points via video edge detection</li> <li>• Manual autofocus</li> <li>• Show live images</li> <li>• Archiving and output of live images</li> <li>• Zoom and light control, programmable (with the <i>Light/Zoom</i> versions)</li> <li>• Video connection for digital USB camera (with the <i>Video</i> versions)</li> <li>• Light control over six light sources and zoom control (with the <i>Video</i> and <i>Light/Zoom</i> versions)</li> </ul>
<b>CNC<sup>1)</sup></b>	<ul style="list-style-type: none"> <li>• Automation of measurement tasks</li> <li>• Axis control (for XYZQ) for servo and stepper motors</li> <li>• Autofocus via stepper-motor control (Z axis)</li> <li>• CNC outputs and inputs for joystick</li> </ul>
<b>Error compensation</b>	<ul style="list-style-type: none"> <li>• Linear, and segmented over any number of points</li> <li>• Squareness calibration</li> <li>• Matrix compensation over up to 50 x 50 points</li> </ul>
<b>Other connections</b>	<ul style="list-style-type: none"> <li>• Foot switch for two functions</li> </ul>
<b>Accessories</b>	Foot switch, fiber-optic cables, holder for fiber-optic cables, servo amplifier, calibration standard, demo part, distribution cable
<b>PC interface</b>	PCI
<b>Dimensions</b>	100 mm x 250 mm

\* Please select when ordering


<sup>1)</sup> See the configuration table for possible combinations

<sup>2)</sup> Depends on the signal period of the connected encoder as well as the subdivision factor




### Programming of parts

Difficult and repetitive measuring tasks can be simplified with the aid of a program that you either create yourself or record automatically during measurement of the first part. QUADRA-CHEK learns the reference points, the sequence of measurements, tolerances and data-output commands. QUADRA-CHEK visually leads you to the features to be probed when the program is run. The program view also provides you with an optimum overview of the process.

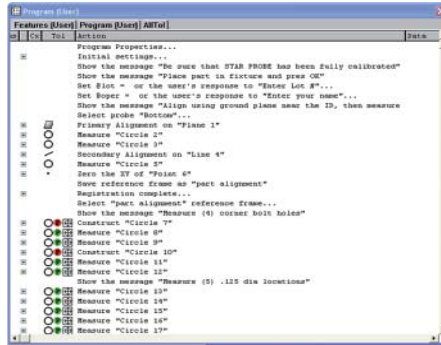


### Excerpt from the possibilities for the construction of features:


#### 2-D possibilities




Intersection of two lines




Intersection of line and circle



Intersection of two circles




Hole circle formed from three or more circles



Bisector of two lines

### Integrated image processing

The integrated image processing function included with the video-function versions provides a special benefit: the video image is shown on the screen in real time and can be saved. QUADRA-CHEK can even assume complete control of the illumination and the motor zoom. A digital USB camera can be connected.

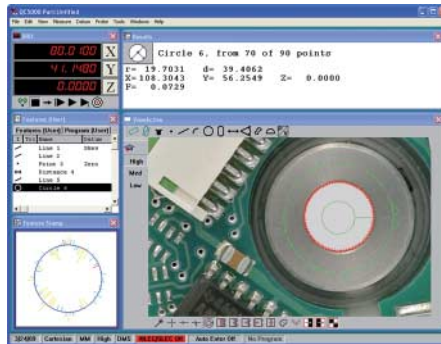

In order to quickly and directly compare the actual status and nominal status, import the parts drawing in DXF or IGS format, and place it over the video image.

### Axis positioning


The CNC versions of IK 5000 QUADRA-CHEK work as full-fledged controls, directly controlling the positioning of the X, Y, Z and Q axes. Servo and stepper motors can be connected. The necessary servo amplifiers for two or three axes are available as accessories.

### Automating


Programs running in combination with the CNC function of IK 5000 QUADRA-CHEK run automatically. This minimizes the effects of subjective assessments, and increases data throughput noticeably. By automating series of measurements and complex procedures, you spare yourself the strain of performing repetitive measuring tasks.




#### 3-D possibilities




Intersection of cylinder and surface



Plane from plane and 3-D line



Cone taper



Intersection of sphere and line

# ND 1200T TOOL-CHEK

## – the Digital Readout for Tool Presetters

The TOOL-CHEK ND 1200T digital readout is designed specifically for tool presetters. It supports X and Z axes.

### Description

The ND 1200T has a monochrome flat-panel display. The robust, diecast aluminum enclosure meets the demands of production floors.

### Functions

The self-explanatory user guidance of the TOOL-CHEK ND 1200T digital readout provides you with optimum support for all functions.

You can define up to 99 tool adapters for the tool holder. You can select either an absolute reference point, or one that refers to a master adapter. You can define the axis association and counting direction separately for each adapter.

Tool measurement usually consists of measuring the length and diameter or radius of a tool. You can also measure radii (e.g. for spherical cutters) and angles (e.g. for indexable inserts or lathe tools). The ND 1200T stores up to 300 tools. You can respectively show and print each actual value, nominal value and deviation.

You can group various tools, e.g. those that are necessary for machining a certain part. Create this setup plan either by selecting the tools from the tool list, or by measuring each tool.

For tools that are too large to be shown on the projector, such as teeth with a radius, you can freeze an axis for measurement. If a tool has more than one tooth, then you use the incremental function to ascertain the tool data in reference to the master tooth as well.

### Data interfaces

You use the data interfaces to transmit the tool data and to load and save settings, compensation values and saved tools. The RS-232-C/V.24 serial interface enables communication with a PC. You can connect printers or memory media to the USB port.

### Measuring radii and angles

You probe several points with the crosshairs in order to measure the radius. The digital readout calculates the radius and any form error from this. In order to measure a cutting edge angle, probe the two sides of the angle at two points each. The results are the intersection of the two lines as well as the inside angle "A".

T	L_00	mm
⊖ Ctr	<b>X</b>	<b>4.769</b>
	<b>Z</b>	<b>0.111</b>
	r 0.145	F 0.000
Actual	Center	C Max

### Label printing

You can connect various label printers via the USB port. The control commands necessary for this are already set, and can be called via the menu function.

<b>Print</b>		mm
About	Auto Label	Yes
Display	Auto Report	No
Encoders	Label Format	Metronics1
Hot Keys	Pre Line	
Print	Post Line	10 13
Form Chars	Pre Form	
Ports	Label Lines	5
Supervisor	Skip Lines	0
Squareness	Label Indent	0
LEC		
▼		
List		

### Tool list

You can also store the data of all measured and numbered tools, and even print this data in a clearly structured list. Use the menu to specify which information is included in the list.

Tool list: Temp										
TOOL-#	SG	POT	Z-ACT.	X-ACT.	Z-NOM.	X-NOM.	Z-DEV.	X-DEV.	R/D	I/MM
10	01	4	100.1000	28.1000	0.0000	0.0000	100.1000	28.1000	D	mm
20	01	5	100.1400	29.9400	0.0000	0.0000	100.1400	29.9400	D	mm
30	01	6	99.9400	29.4600	0.0000	0.0000	99.9400	29.4600	D	mm
40	01	7	100.1200	29.8000	0.0000	0.0000	100.1200	29.8000	D	mm
50	01	8	100.1500	29.5600	0.0000	0.0000	100.1500	29.5600	D	mm
60	01	10	99.8800	30.2000	0.0000	0.0000	99.8800	30.2000	D	mm



ND 1202T	
<b>Axes</b>	2 (XZ)
<b>Encoder inputs*</b>	$\sim$ 1 V <sub>pp</sub> or $\square$ TTL (other interfaces upon request)
<b>Subdivision factor*</b>	10-fold (only for 1 V <sub>pp</sub> )
<b>Display step<sup>1)</sup></b>	Adjustable, max. 7 digits <i>Linear axis:</i> 1 mm to 0.0001 mm <i>Angular axis:</i> 1° to 0.0001° (00° 00' 01")
<b>Display</b>	5.7" monochrome flat-panel display for position values, dialogs and inputs, and soft keys
<b>Functions</b>	<ul style="list-style-type: none"> <li>• Point measurement with crosshairs</li> <li>• 99 tool adapters</li> <li>• Memory for 300 tools</li> <li>• Counting direction and axis assignment depend on the adapter</li> <li>• Radius/diameter switching</li> <li>• Entry of tolerances</li> <li>• Circle and angle measurement</li> </ul>
<b>Error compensation</b>	<ul style="list-style-type: none"> <li>• Linear, and segmented over up to 150 points</li> <li>• Parallelism error</li> </ul>
<b>Data interface</b>	<ul style="list-style-type: none"> <li>• RS-232-C/V.24</li> <li>• USB</li> </ul>
<b>Other connections</b>	Foot switch for two functions, or remote keypad
<b>Accessories</b>	Foot switch, remote keypad, protective cover
<b>Main power input</b>	100 V~ to 240 V~ (-15 % to +10 %), 43 Hz to 63 Hz
<b>Operating temperature</b>	0 °C to +45 °C
<b>Protection EN 60529</b>	IP 00, front panel IP 40
<b>Mounting*</b>	Tilting base or mounting base
<b>Weight</b>	<i>ND with tilting base:</i> approx. 4.8 kg; <i>ND with mounting base:</i> approx. 2 kg

\* Please select when ordering

<sup>1)</sup> Depends on the signal period of the connected encoder as well as the subdivision factor

# ND 2100G GAGE-CHEK

## – the Digital Readouts for Multipoint Inspection Apparatuses

The ND 2100G GAGE-CHEK readouts are versatile metrology displays for measuring and inspection tasks in manufacturing and quality assurance. With inputs for up to eight encoders, they are predestined for multipoint measurements from simple pass/fail detection up to complex SPC evaluation.

### Description

The ND 2100G readouts have a robust, diecast aluminum enclosure, and a keyboard suited to their environment. A large, graphic, color screen displays the measured values, the soft-key row and other information.

### Functions

The inputs can be assigned and combined as desired with mathematical, trigonometric or statistical formulas. This makes it possible to measure even complex dimensions such as thickness, flatness, volume and more. The results are displayed numerically or graphically as a color bar graph or a dial, or archived for statistical process control (SPC). The GAGE-CHEK can be configured for basic or advanced applications. Soft keys and function keys can be adapted as required. The Min/Max function of the ND 2100G readouts monitors and stores the highest and lowest measured or calculated value. Warning and tolerance limits can be assigned to each display value. Results outside of the tolerance are marked with a different color. An acoustic alarm sounds simultaneously. Tolerance values, SPC parameters and custom formulas are stored for individual parts. GAGE-CHEK can manage up to 100 parts, each with up to 16 visible measurement features and 16 hidden measurement features. The rapid acquisition of measurement data makes monitoring dynamic events, such as the eccentricity of a rotating shaft, possible.


### Data interfaces

The GAGE-CHEK features various interfaces for communicating with parent systems:

- RS-232-CV.24 for PC, also for remote operation of the GAGE-CHEK
- USB


### Position display

The display values appear in large, easy-to-read numbers. Values outside the tolerance are color-coded, immediately notifying you of errors.

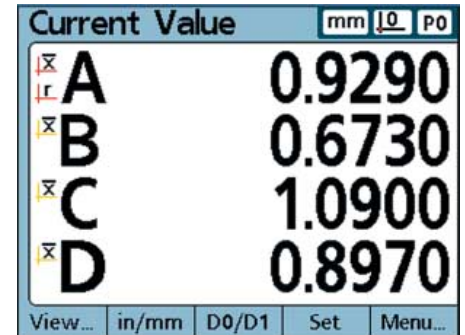


### Bar diagram

You can select to have the values shown as a color-enhanced vertical or horizontal bar graph. The defined warning limits and tolerance limits provide instant feedback. If these limits are exceeded, the column color changes from green to yellow or red, informing you explicitly of critical dimensions.

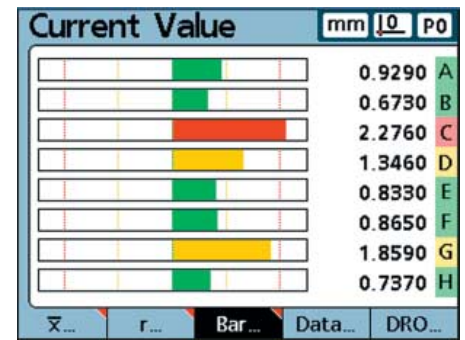


### SPC and data storage

GAGE-CHEK includes integrated SPC studies such as mean value charts (X bar) and range charts (R). Min, max, sigma, cp and cpk are also calculated, and are clearly displayed as a graph or histogram. Historical raw data can be saved in a tabular numeric display. Each dimension and all data are time and date stamped.

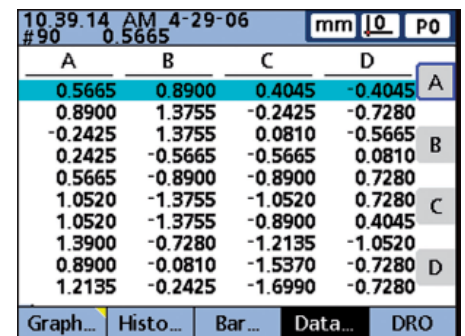

### Formulas and combinations

You can use mathematical and trigonometric formulas, as well as logical conditions, to combine individual measured values or measurement sequences with each other, and so create complex calculations. This can be used, for example, to calculate and display the circumference of a turned part, the volume of a cube, or the angle between two cams, and also to assign tolerance limits to these values.

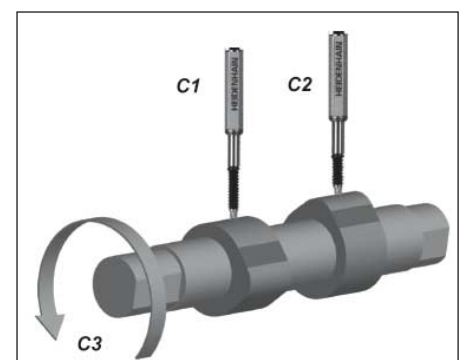



	ND 2104 G	ND 2108 G
<b>Axes</b>	4	8
<b>Encoder inputs*</b>	~ 1 V <sub>pp</sub> or TTL (other interfaces upon request)	
<b>Subdivision factor</b>	10-fold (only for 1 V <sub>pp</sub> )	
<b>Display step<sup>1)</sup></b>	Adjustable, max. 7 digits Linear axis: 1 mm to 0.00001 mm Angular axis: 1° to 0.0001° or 00° 00' 01"	
<b>Display</b>	5.7" color flat-panel display for position values, dialogs and inputs, graphics functions and soft keys	
<b>Functions</b>	<ul style="list-style-type: none"> <li>• Part-programming of up to 100 parts</li> <li>• Graphic display of measurement results</li> <li>• Classification using tolerance and warning limits, with display as a bar graph</li> <li>• Measurement series with MIN/MAX display</li> <li>• Mathematical and trigonometric formulas</li> <li>• Functions for statistical process control (SPC)</li> <li>• Graphic display of measurement results and distribution</li> <li>• Data storage of values and formulas</li> </ul>	
<b>Error compensation</b>	<ul style="list-style-type: none"> <li>• Linear, and segmented over up to 200 points</li> </ul>	
<b>Data interface</b>	<ul style="list-style-type: none"> <li>• RS-232-C/V.24</li> <li>• USB</li> </ul>	
<b>Switching inputs</b>	5 TTL inputs (freely definable)	
<b>Switching outputs</b>	12 TTL outputs (freely definable) 2 relay outputs	
<b>Other connections</b>	Foot switch for two functions	
<b>Accessories</b>	Mounting base, foot switch, remote keypad, protective cover	
<b>Main power input</b>	100 V~ to 240 V~ (-15 % to +10 %), 43 Hz to 63 Hz	
<b>Operating temperature</b>	0 °C to +45 °C	
<b>Protection EN 60529</b>	IP 40	
<b>Mounting*</b>	Tilting base or mounting base	
<b>Weight</b>	ND with tilting base: approx. 4.8 kg; ND with mounting base: approx. 2 kg	

\* Please select when ordering



<sup>1)</sup> Depends on the signal period of the connected encoder as well as the subdivision factor

# Mounting

## Dimensions of ND 1000/ND 2000



ND 1300 with tilting base

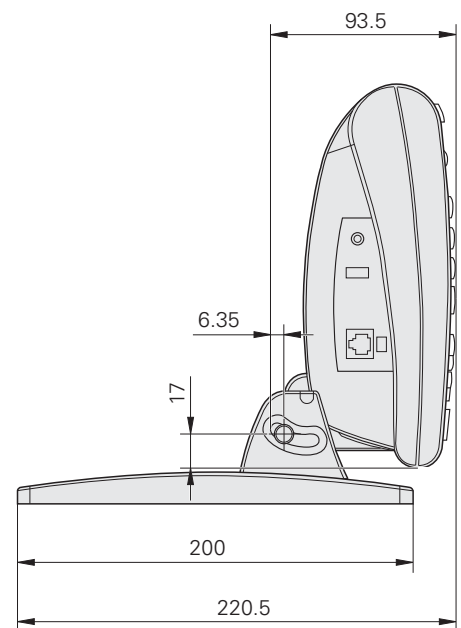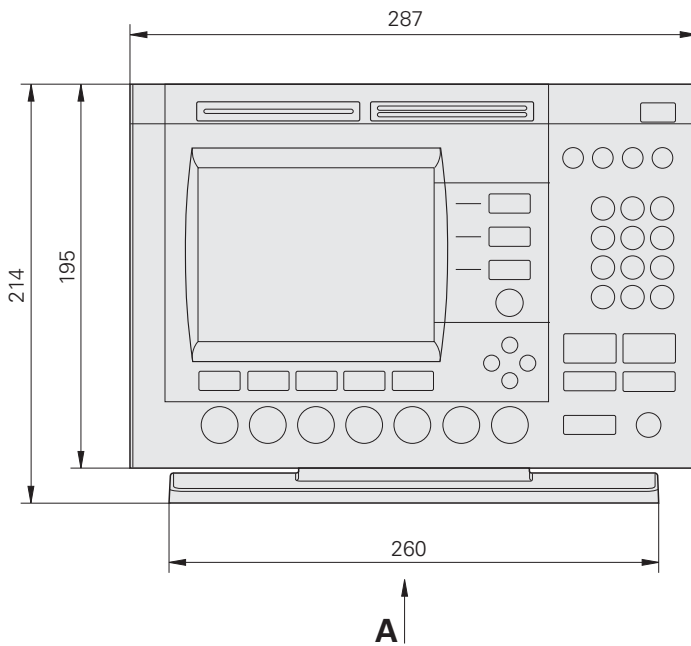

Dimensions in mm



Tolerancing ISO 8015

ISO 2768 - m H

< 6 mm:  $\pm 0.2$  mm

# Mounting and Protection

## Mounting

The ND 1000 and ND 2000 are shipped with either a tilting base or a mounting base.

## Tilting base


The readout can be used as a tabletop unit when placed on the tilting base. The readout can then be tilted forward or backward by up to 20° for the best reading angle. The tilting base can be attached with M5 screws.

ID 382892-02


## Mounting base

The mounting base is used to attach the ND 1000 or ND 2000 to a mounting arm or directly on the machine. It also permits tilting of the readout.

ID 682419-01

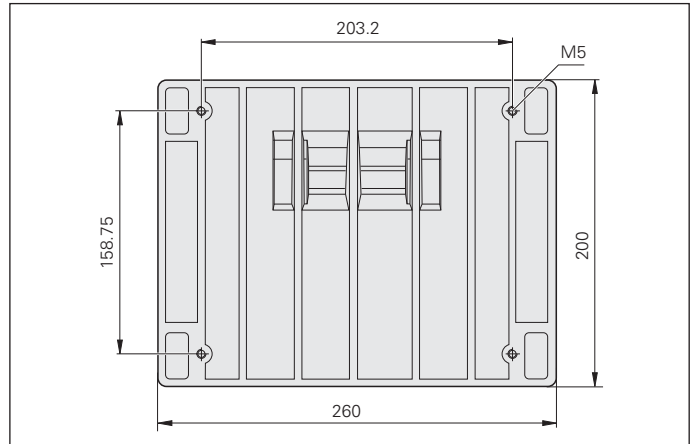

Mounting base

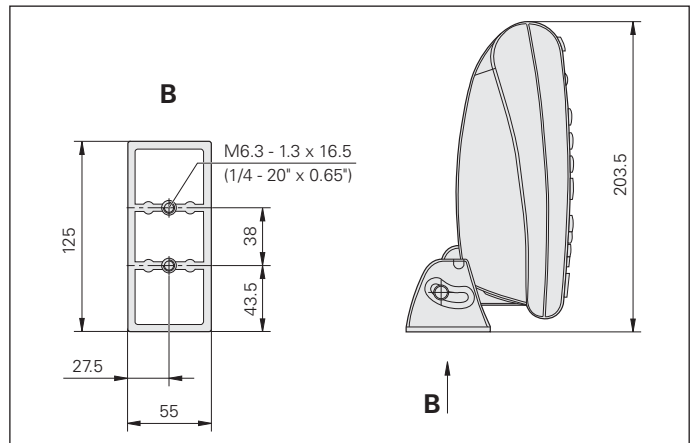

## Protective cover (accessory)

Protective covers are accessories for protecting the keyboard and screen of the ND 1000/ND 2000 from becoming soiled. The display can still be easily read through the transparent protective covers. They fit themselves optimally to the front of the unit, without impairing the ease of operation.

ND 11xx; 1/2 axes	ID 681051-02
ND 11xx; 3/4 axes	ID 681051-03
ND 12xx	ID 681051-01
ND 21xx	ID 681051-04



# Accessories


## Calibration and Demonstration Parts

HEIDENHAIN offers various calibration parts as accessories in order to calibrate the optical and tactile edge detection methods.

### Calibration standard

For the calibration of video measuring machines, measuring microscopes and profile projectors. It can be traced back to the national or international standards.

ID 681047-01

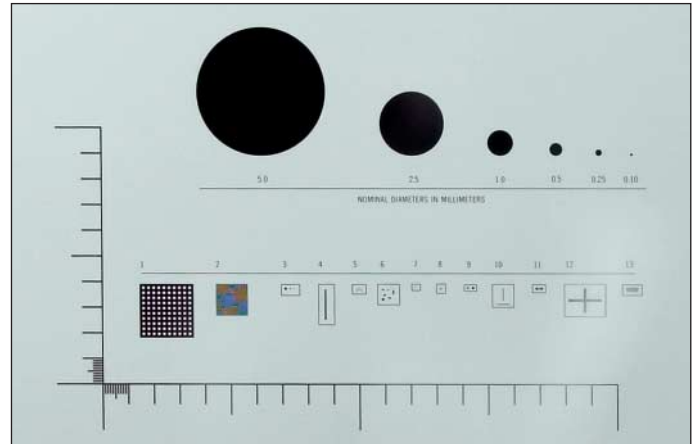

### 2-D demo part

The 2-D demo part is included with the ND 1200, ND 1300 and IK 5000. The application examples in the User's Manuals are based on this part. It can be reordered if a replacement is necessary.

ID 681047-02



### 3-D demo part (accessory)

Demo part for touch-probe applications. Examples in the ND 1400 and IK 5000 User's Manuals are based on this part.

ID 681048-01



### 3-D demo part for multi-sensor scanning (accessory)

Demo part specifically for applications that combine touch-probe systems and video edge detection. It is used for the examples in the IK 5000 User's Manual.

ID 681048-02



# External Control Elements

The digital readouts and the PC package can be operated easily and intuitively. However, remote operability may also be useful and convenient in some situations. The following components are available for remote operation:

**Foot switch** (accessory)  
With two freely assignable keys  
Cable length: 2.4 m

For ND with RJ 45 connector  
ID 681041-01

For IK 5000 with 3-pin DIN connector  
ID 681041-02



**Remote keypad** (accessory)  
For remote operation of the digital readouts; features a numeric keypad and "enter" and "finish" keys; cable length: 4.5 m; with RJ 45 connector.

ID 681043-01



**Joystick** (accessory)  
For remote operation and sensitive traversing of axes for ND 1300 and IK 5000. With 15-pin D-sub connector.

Without trackball ID 681044-02  
With trackball ID 681044-01



# Accessories

## Optical Edge Detector

Two fiber-optic cables are necessary for edge detection with the optical edge detector. One fiber-optic cable is attached to the projection screen with a transparent holder. The second cable is attached near the transmitted light source so that the fibers point toward the light source. The following accessory components are required.

### Fiber-optic cable (accessory)

With one right-angle end and an SMA connector (subminiature A) for ND or IK.

Bend radius:  $\geq 25$  mm

Temperature:  $\leq 100$  °C

Lengths: 2 m, 3 m, 5 m

ID 681049-xx



### Holder (accessory)

With a hole for accepting the right-angle end of fiber-optic cables. Transparent design so that it can be attached to the projection screen.

Lengths: 350 mm, 600 mm, 760 mm

ID 681050-xx



### Fiber-optic cable connector (accessory)

Two SMA connectors (subminiature A) for connecting an integrated edge detector.

Bend radius:  $\geq 25$  mm

Temperature:  $\leq 100$  °C

Lengths: 2 m, 3 m, 5 m

ID 681049-xx



# Servo Amplifiers

## Servo amplifiers for CNC

For the versions with CNC axis positioning, HEIDENHAIN supplies the appropriate servo amplifiers both for stepper motors and for servo motors. The cables for connection to the digital readout or the PC are included in the items supplied.

### Servo amplifier for CNC stepper motor (accessory)

For two-phase stepper motors  
Line voltage: 240 V  
Rated voltage: 48 V–

*For 2 axes:*

Current per axis:  $\leq 2.5$  A  
Power per axis:  $\leq 120$  W  
ID 681045-01

*For 3 axes:*

Current per axis:  $\leq 1.67$  A  
Power per axis:  $\leq 80$  W  
ID 681045-02

### Servo amplifier for CNC servo motor (accessory)

For servo motors with brushes  
Line voltage: 240 V  
Rated voltage: 48 V–

*For 2 axes:*

Continuous current per axis:  $\leq 3$  A  
Rated power per axis:  $\leq 150$  W  
ID 681046-01

*For 3 axes:*

Continuous current per axis:  $\leq 2$  A  
Rated power per axis:  $\leq 100$  W  
ID 681046-02

## Servo amplifier for zooming

A separate servo amplifier is necessary for the zoom function of the ND 1300. It can also be used for the IK 5000 if the performance of the integrated amplifier does not suffice (0.4 W).

### Servo amplifier for zooming with stepper motor (accessory)

For two-phase stepper motors in open-loop systems (e.g. for Navitar zoom)

Line voltage: 100 V to 240 V  
Rated voltage: 12 V–  
Current:  $\leq 2$  A  
Power:  $\leq 160$  W

*With EU power cable*  
ID 722334-02

*With US power cable*  
ID 722334-01



# Interfaces

## Digital Readouts

The digital readouts feature interfaces for encoders, for communication and for external components.



	ND 1102 ND 1103 ND 1104	ND 1202 ND 1203	ND 1204	ND 1302 ND 1303 ND 1304	ND 1404	ND 1202 T	ND 2104 G ND 2108 G	
<b>Encoders</b>	1 V <sub>pp</sub> or TTL							
<b>Touch probe</b>	● <sup>1)</sup>	-	-	-	-	● <sup>1)</sup>	-	
<b>Video</b>	-	-	-	● <sup>2)</sup>	-	-	-	
<b>Fiber-optic cable</b> Optical edge detector	-	Option	Upon request	-	●	-	-	
<b>Data</b>	RS-232-C/V.24 and USB type A							
<b>Light control</b>	-	-	-	Option	-	-	-	
<b>Zoom</b>	-	-	-	Option	-	-	-	
<b>CNC outputs</b>	-	-	-	Option	Option	-	-	
<b>Foot switch</b>	●	●	●	●	●	●	●	
<b>Remote keypad</b>	●	●	●	●	●	-	●	
<b>Switching outputs</b>	-	-	-	-	-	-	12 TTL 2 relays	
<b>Switching inputs</b>	-	-	-	-	-	-	5 TTL	

- = Standard
- = Not available
- 1) HEIDENHAIN touch probe or Renishaw touch probe
- 2) S-Video and composite

# IK 5000





Connections to the IK 5000 are made via its D-sub connectors. Depending on the version, further connections are made through one, two or three additional slot covers. Please order the adapter cables necessary between the individual components separately.

		IK 5293	IK 5294	IK 5394-EG	IK 5394-3D	IK 5493	IK 5494-2D	IK 5494-3D	IK 5594
	Slots <sup>1)</sup>	2	2	3	4	3	4	4	4
	Location								
<b>Encoders for X, Y, Z</b>	IK	1 V <sub>PP</sub> or TTL							
<b>CNC outputs</b>	IK	-	-	-	-	●	●	●	●
<b>Foot switch</b>	IK	●	●	●	●	●	●	●	●
<b>Fiber-optic cable</b>	Slot L	-	-	● <sup>2)</sup>	-	● <sup>2)</sup>	-	-	-
<b>Touch probe<sup>3)</sup></b>	Slot 1	●	-	-	●	-	-	●	TP 200
<b>Light control</b>	Slot 1	-	-	-	●	-	●	●	●
<b>Encoder for Q</b>	Slot 2	-	1 V <sub>PP</sub> or TTL						
<b>Zoom</b>	Slot 3	-	-	-	●	-	●	●	●
<b>Video</b>	PC	-	-	-	USB camera <sup>4)</sup>	-	USB camera <sup>4)</sup>	USB camera <sup>4)</sup>	USB camera <sup>4)</sup>

● = Standard; - = Not available

<sup>1)</sup> Including IK; <sup>2)</sup> Connected directly to the IK PCB, special slot cover with cable guide included in delivery

<sup>3)</sup> HEIDENHAIN touch probe or Renishaw touch probe; <sup>4)</sup> Connected to the USB port of the PC

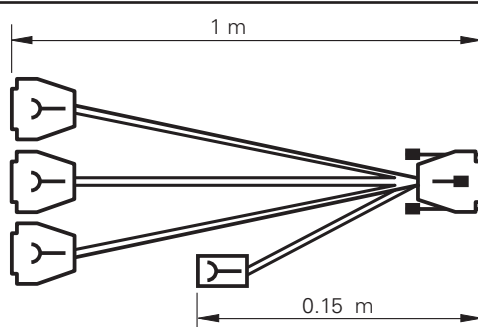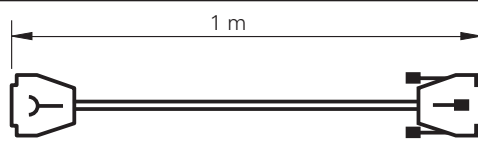Adapter cables		1 V <sub>PP</sub>	TTL
Complete with D-sub connector (female), 15-pin (1 V <sub>PP</sub> ) or 9-pin (TTL), and 3-pin mini-DIN connector (female)  For connecting the <b>XYZ encoders</b> and the <b>foot switch</b> to the IK 5000			
	For 3 axes XYZ and foot switch	540550-40	540550-10
	For 2 axes XY and foot switch	540540-24	540540-05
Complete with D-sub connector (female), 15-pin (1 V <sub>PP</sub> ) or 9-pin (TTL)  For connecting the <b>Q encoder</b> to the IK 5000		540541-24	540541-05


# Interfaces


## Encoders

Depending on the versions, the digital readouts and the PC board are designed for encoders with 1 V<sub>PP</sub> or TTL interface. Other interfaces are available upon request. A distribution cable is necessary in order to attach the encoders to the IK 5000.

### Pin layout $\sim 1 V_{PP}$

Mating connector:  
15-pin D-sub connector (male)



	Power supply				Incremental signals						Others
	4	12	2	10	1	9	3	11	14	7	5/6/8/ 13/15
$\sim 1 V_{PP}$	U <sub>P</sub>	Sensor U <sub>P</sub>	0V	Sensor 0V	A+	A-	B+	B-	R+	R-	/


**Cable shield** connected to housing; **U<sub>P</sub>** = power supply voltage


**Sensor:** The sensor line is connected in the encoder with the corresponding power line.

Vacant pins or wires must not be used!

### Pin layout $\square$ TTL

Mating connector:  
9-pin D-sub connector (male)



	Power supply			Incremental signals					
	7	6	1	2	3	4	5	9	8
$\square$ TTL	U <sub>P</sub>	0V	/	U <sub>a1</sub>	$\overline{U}_{a1}$	U <sub>a2</sub>	$\overline{U}_{a2}$	U <sub>a0</sub>	$\overline{U}_{a0}$

**Cable shield** connected to housing; **U<sub>P</sub>** = power supply voltage

Vacant pins or wires must not be used!

# Software

## QUADRA-CHEK Wedge


### QUADRA-CHEK Wedge software

For communication between the ND and PC  
ID 709141-01


The QUADRA-CHEK Wedge software simplifies communication between an ND 1000/ND 2000 and a Windows-based PC. The measured values are transmitted from the digital readout to the PC via a V.24 connection, and are written directly to an Excel table, where the data can be edited, saved and printed. A suitable V.24/RS-232 cable is included with QUADRA-CHEK Wedge (cable length: 3 m).

### System requirements

Windows XP, Vista or 7  
Internet Explorer 6.0 or higher  
Excel 2003 or later

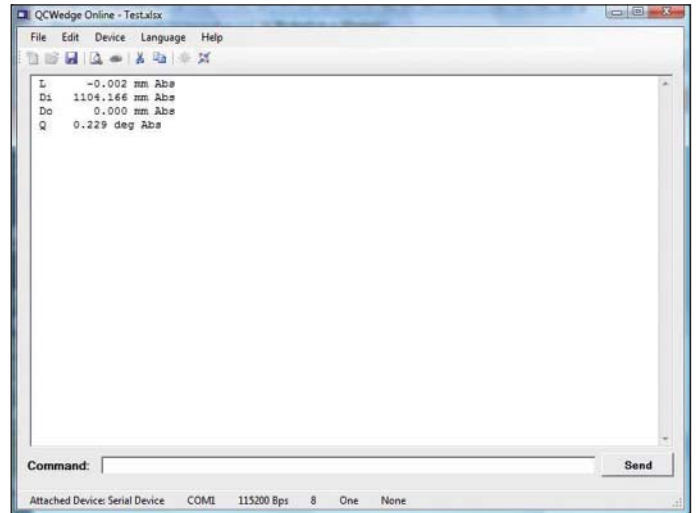

The values measured by the digital readout are transmitted to the PC ...

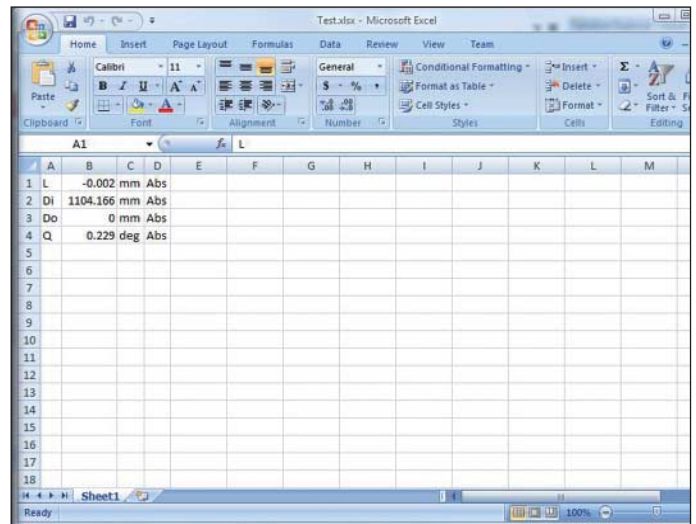

...and can be saved in an Excel table.

# HEIDENHAIN

## DR. JOHANNES HEIDENHAIN GmbH

Dr.-Johannes-Heidenhain-Straße 5

83301 Traunreut, Germany

☎ +49 8669 31-0

FAX +49 8669 5061

E-mail: info@heidenhain.de

www.heidenhain.de

Vollständige und weitere Adressen siehe [www.heidenhain.de](http://www.heidenhain.de)  
For complete and further addresses see [www.heidenhain.de](http://www.heidenhain.de)

<b>DE</b>	<b>HEIDENHAIN Technisches Büro Nord</b> 12681 Berlin, Deutschland ☎ 030 54705-240	<b>ES</b>	<b>FARRESA ELECTRONICA S.A.</b> 08028 Barcelona, Spain <a href="http://www.farresa.es">www.farresa.es</a>	<b>PH</b>	<b>Machinebanks Corporation</b> Quezon City, Philippines 1113 E-mail: info@machinebanks.com
	<b>HEIDENHAIN Technisches Büro Mitte</b> 08468 Heinsdorfergrund, Deutschland ☎ 03765 69544	<b>FI</b>	<b>HEIDENHAIN Scandinavia AB</b> 02770 Espoo, Finland <a href="http://www.heidenhain.fi">www.heidenhain.fi</a>	<b>PL</b>	<b>APS</b> 02-489 Warszawa, Poland <a href="http://www.apservis.com.pl">www.apservis.com.pl</a>
	<b>HEIDENHAIN Technisches Büro West</b> 44379 Dortmund, Deutschland ☎ 0231 618083-0	<b>FR</b>	<b>HEIDENHAIN FRANCE sarl</b> 92310 Sevres, France <a href="http://www.heidenhain.fr">www.heidenhain.fr</a>	<b>PT</b>	<b>FARRESA ELECTRÓNICA, LDA.</b> 4470 - 177 Maia, Portugal <a href="http://www.farresa.pt">www.farresa.pt</a>
	<b>HEIDENHAIN Technisches Büro Südwest</b> 70771 Leinfelden-Echterdingen, Deutschland ☎ 0711 993395-0	<b>GB</b>	<b>HEIDENHAIN (G.B.) Limited</b> Burgess Hill RH15 9RD, United Kingdom <a href="http://www.heidenhain.co.uk">www.heidenhain.co.uk</a>	<b>RO</b>	<b>HEIDENHAIN Reprezentantă Romania</b> Braşov, 500338, Romania <a href="http://www.heidenhain.ro">www.heidenhain.ro</a>
	<b>HEIDENHAIN Technisches Büro Südost</b> 83301 Traunreut, Deutschland ☎ 08669 31-1345	<b>GR</b>	<b>MB Milionis Vassilis</b> 17341 Athens, Greece <a href="http://www.heidenhain.gr">www.heidenhain.gr</a>	<b>RS</b>	Serbia → <b>BG</b>
		<b>HK</b>	<b>HEIDENHAIN LTD</b> Kowloon, Hong Kong E-mail: service@heidenhain.com.hk	<b>RU</b>	<b>OOO HEIDENHAIN</b> 125315 Moscow, Russia <a href="http://www.heidenhain.ru">www.heidenhain.ru</a>
<b>AR</b>	<b>NAKASE SRL.</b> B1653AOX Villa Ballester, Argentina <a href="http://www.heidenhain.com.ar">www.heidenhain.com.ar</a>	<b>HR</b>	Croatia → <b>SL</b>	<b>SE</b>	<b>HEIDENHAIN Scandinavia AB</b> 12739 Skärholmen, Sweden <a href="http://www.heidenhain.se">www.heidenhain.se</a>
<b>AT</b>	<b>HEIDENHAIN Techn. Büro Österreich</b> 83301 Traunreut, Germany <a href="http://www.heidenhain.de">www.heidenhain.de</a>	<b>HU</b>	<b>HEIDENHAIN Kereskedelmi Képviselő</b> 1239 Budapest, Hungary <a href="http://www.heidenhain.hu">www.heidenhain.hu</a>	<b>SG</b>	<b>HEIDENHAIN PACIFIC PTE LTD.</b> Singapore 408593 <a href="http://www.heidenhain.com.sg">www.heidenhain.com.sg</a>
<b>AU</b>	<b>FCR Motion Technology Pty. Ltd</b> Laverton North 3026, Australia E-mail: vicsales@fcrmotion.com	<b>ID</b>	<b>PT Servitama Era Toolsindo</b> Jakarta 13930, Indonesia E-mail: ptset@group.gts.co.id	<b>SK</b>	<b>KOPRETINA TN s.r.o.</b> 91101 Trenčín, Slovakia <a href="http://www.kopretina.sk">www.kopretina.sk</a>
<b>BA</b>	Bosnia and Herzegovina → <b>SL</b>	<b>IL</b>	<b>NEUMO VARGUS MARKETING LTD.</b> Tel Aviv 61570, Israel E-mail: neumo@neumo-vargus.co.il	<b>SL</b>	<b>Posredništvo HEIDENHAIN NAVO d.o.o.</b> 2000 Maribor, Slovenia <a href="http://www.heidenhain-hubl.si">www.heidenhain-hubl.si</a>
<b>BE</b>	<b>HEIDENHAIN NV/SA</b> 1760 Roosdaal, Belgium <a href="http://www.heidenhain.be">www.heidenhain.be</a>	<b>IN</b>	<b>HEIDENHAIN Optics &amp; Electronics India Private Limited</b> Chennai - 600 031, India <a href="http://www.heidenhain.in">www.heidenhain.in</a>	<b>TH</b>	<b>HEIDENHAIN (THAILAND) LTD</b> Bangkok 10250, Thailand <a href="http://www.heidenhain.co.th">www.heidenhain.co.th</a>
<b>BG</b>	<b>ESD Bulgaria Ltd.</b> Sofia 1172, Bulgaria <a href="http://www.esd.bg">www.esd.bg</a>	<b>IT</b>	<b>HEIDENHAIN ITALIANA S.r.l.</b> 20128 Milano, Italy <a href="http://www.heidenhain.it">www.heidenhain.it</a>	<b>TR</b>	<b>T&amp;M Mühendislik San. ve Tic. LTD. ŞTİ.</b> 34728 Ümraniye-Istanbul, Turkey <a href="http://www.heidenhain.com.tr">www.heidenhain.com.tr</a>
<b>BR</b>	<b>DIADUR Indústria e Comércio Ltda.</b> 04763-070 - São Paulo - SP, Brazil <a href="http://www.heidenhain.com.br">www.heidenhain.com.br</a>	<b>JP</b>	<b>HEIDENHAIN K.K.</b> Tokyo 194-0215, Japan <a href="http://www.heidenhain.co.jp">www.heidenhain.co.jp</a>	<b>TW</b>	<b>HEIDENHAIN Co., Ltd.</b> Taichung 40768, Taiwan R.O.C. <a href="http://www.heidenhain.com.tw">www.heidenhain.com.tw</a>
<b>BY</b>	<b>Belarus GERTNER Service GmbH</b> 50354 Huerth, Germany <a href="http://www.gertner.biz">www.gertner.biz</a>	<b>KR</b>	<b>HEIDENHAIN Korea LTD.</b> Gasam-Dong, Seoul, Korea 153-782 <a href="http://www.heidenhain.co.kr">www.heidenhain.co.kr</a>	<b>UA</b>	<b>Gertner Service GmbH Büro Kiev</b> 01133 Kiev, Ukraine <a href="http://www.gertner.biz">www.gertner.biz</a>
<b>CA</b>	<b>HEIDENHAIN CORPORATION</b> Mississauga, Ontario L5T2N2, Canada <a href="http://www.heidenhain.com">www.heidenhain.com</a>	<b>ME</b>	Montenegro → <b>SL</b>	<b>US</b>	<b>HEIDENHAIN CORPORATION</b> Schaumburg, IL 60173-5337, USA <a href="http://www.heidenhain.com">www.heidenhain.com</a>
<b>CH</b>	<b>HEIDENHAIN (SCHWEIZ) AG</b> 8603 Schwerzenbach, Switzerland <a href="http://www.heidenhain.ch">www.heidenhain.ch</a>	<b>MK</b>	Macedonia → <b>BG</b>	<b>VE</b>	<b>Maquinaria Diekmann S.A.</b> Caracas, 1040-A, Venezuela E-mail: purchase@diekmann.com.ve
<b>CN</b>	<b>DR. JOHANNES HEIDENHAIN (CHINA) Co., Ltd.</b> Beijing 101312, China <a href="http://www.heidenhain.com.cn">www.heidenhain.com.cn</a>	<b>MX</b>	<b>HEIDENHAIN CORPORATION MEXICO</b> 20235 Aguascalientes, Ags., Mexico E-mail: info@heidenhain.com	<b>VN</b>	<b>AMS Advanced Manufacturing Solutions Pte Ltd</b> HCM City, Việt Nam E-mail: davidgoh@amsvn.com
<b>CZ</b>	<b>HEIDENHAIN s.r.o.</b> 102 00 Praha 10, Czech Republic <a href="http://www.heidenhain.cz">www.heidenhain.cz</a>	<b>MY</b>	<b>ISOSERVE Sdn. Bhd</b> 56100 Kuala Lumpur, Malaysia E-mail: isoserve@po.jaring.my	<b>ZA</b>	<b>MAFEMA SALES SERVICES C.C.</b> Midrand 1685, South Africa <a href="http://www.heidenhain.co.za">www.heidenhain.co.za</a>
<b>DK</b>	<b>TPTEKNIK A/S</b> 2670 Greve, Denmark <a href="http://www.tp-gruppen.dk">www.tp-gruppen.dk</a>	<b>NL</b>	<b>HEIDENHAIN NEDERLAND B.V.</b> 6716 BM Ede, Netherlands <a href="http://www.heidenhain.nl">www.heidenhain.nl</a>		
		<b>NO</b>	<b>HEIDENHAIN Scandinavia AB</b> 7300 Orkanger, Norway <a href="http://www.heidenhain.no">www.heidenhain.no</a>		

Zum Abheften hier falzen! / Fold here for filing!

